



## The representation of coupling interactions in the Material Properties Open Database (MPOD)

Luis E. Fuentes-Cobas, Daniel Chateigner, Mar-a E. Fuentes-Montero, Giancarlo Pepponi, Saulius Grazulis

### ► To cite this version:

Luis E. Fuentes-Cobas, Daniel Chateigner, Mar-a E. Fuentes-Montero, Giancarlo Pepponi, Saulius Grazulis. The representation of coupling interactions in the Material Properties Open Database (MPOD). *Advances in Applied Ceramics*, 2017, 116 (8), pp.428-433. 10.1080/17436753.2017.1343782 . hal-02175399

**HAL Id: hal-02175399**

**<https://normandie-univ.hal.science/hal-02175399>**

Submitted on 30 May 2022

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

# The representation of coupling interactions in the Material Properties Open Database (MPOD)

Luis E. Fuentes-Cobas, Daniel Chateigner, María E. Fuentes-Montero, Giancarlo Pepponi & Saulius Grazulis

To cite this article: Luis E. Fuentes-Cobas, Daniel Chateigner, María E. Fuentes-Montero, Giancarlo Pepponi & Saulius Grazulis (2017) The representation of coupling interactions in the Material Properties Open Database (MPOD), *Advances in Applied Ceramics*, 116:8, 428-433, DOI: [10.1080/17436753.2017.1343782](https://doi.org/10.1080/17436753.2017.1343782)

To link to this article: <https://doi.org/10.1080/17436753.2017.1343782>



© 2017 The Author(s). Published by Informa UK Limited, trading as Taylor & Francis Group



Published online: 18 Aug 2017.



Submit your article to this journal [↗](#)



Article views: 383



View related articles [↗](#)






View Crossmark data [↗](#)



Citing articles: 1 View citing articles [↗](#)

## The representation of coupling interactions in the Material Properties Open Database (MPOD)

Luis E. Fuentes-Cobas <sup>a</sup>, Daniel Chateigner <sup>b</sup>, María E. Fuentes-Montero <sup>c</sup>, Giancarlo Pepponi<sup>d\*</sup> and Saulius Grazulis<sup>e</sup>

<sup>a</sup>Centro de Investigación en Materiales Avanzados (CIMAV), Chihuahua, México; <sup>b</sup>CRISMAT-ENSICAEN, CNRS UMR 6508, Normandie Université, IUT Caen, Université de Caen Normandie, Caen, France; <sup>c</sup>Facultad de Ciencias Químicas, Universidad Autónoma de Chihuahua, Circuito Universitario, Chihuahua, México; <sup>d</sup>MINALab, CMM-irst, Fondazione Bruno Kessler, Trento, Italy; <sup>e</sup>Department of Mathematical Computer Science, Faculty of Mathematics and Informatics, Vilnius University, Vilnius, Lithuania

### ABSTRACT

The Material Properties Open Database (MPOD, <http://mpod.cimav.edu.mx>) is a functional element of the web-based *open databases* system linked with crystallography. MPOD delivers single-crystal tensor properties in several representations, ranging from numerical matrices to 3D printing. Longitudinal moduli surfaces can be displayed in computers as well as in smart cell phones. Properties are stored as ‘mpod’ files. IUCr formatting standards (CIF) are followed. The original published paper containing the data is cited. Structural and experimental information is also registered and linked. ‘Coupling properties’, say piezo-effects and magnetoelectricity, represent interactions linking different subsystems in a material. Currently, piezoelectricity occupies a significant fraction of cases in MPOD. The implications of crystal symmetry in piezoelectricity are systematically taken into account. Matrices’ elements and longitudinal moduli surfaces are checked for consistency with the Neumann principle. The inclusion of magnetoelectric axial tensors introduces exciting features into MPOD.

### ARTICLE HISTORY

Received 2 May 2017  
Accepted 14 June 2017

### KEYWORDS

Crystal properties; open database; anisotropy; Neumann principle



## Introduction

The physical properties of crystalline materials are necessary in many fields, from education to engineering. The properties most commonly considered in traditional studies (Young’s modulus, dielectric constant ...) correspond to experiments in which both the stimulus and the sample’s response are associated with a given subsystem in the material (elasticity, electricity ...). We denote these interactions and properties as ‘principal’. Today’s technology is decidedly dependent on ‘coupling properties’ (piezoelectricity, magnetostriction, magnetoelectricity ...) in which a stimulus in one subsystem generates a response in another one. The most complete, though not intuitive, manner of presenting physical properties is by means of the tensor representation. The classical reference in this field is the Landolt–Börnstein collection [1]. The Materials Project [2,3], UC-Berkeley, represents a highly interesting effort in the direction of calculating theoretically and disclosing the physical properties of materials. Kaminsky’s programmes and data concerning crystalline morphology and properties are also of interest [4]. In this universe, the contribution of the Material Properties Open Database (MPOD) is to openly offer a collection of properties

values based on published experimental data. MPOD was initiated by Chateigner in 2010 and developed in collaboration with Pepponi and Grazulis [5]. In the recent years, with contributions from the Crystallography Group at CIMAV (Centro de Investigación en Materiales Avanzados), MPOD is being expanded. Some directions in which MPOD has grown comprise the inclusion of new electromagnetic properties and the delivery of graphic representations of properties [6]. This article describes the current MPOD tasks. Some focus is put on coupling properties, their representation by different means and the interesting effect of crystal symmetry on materials properties. The organisation of the paper is as follows. First, a brief description of the treatment given to crystal properties in MPOD is given. Second, a representative scan of MPOD cases is presented. Finally, a sampling of the tensor and group theoretical tools behind MPOD is divulged.

## Data treatment in MPOD

The open database MPOD describes the physical properties of single crystals. The information provided is based on experimentally measured tensor magnitudes.

**CONTACT** Luis E. Fuentes-Cobas  [luis.fuentes@cimav.edu.mx](mailto:luis.fuentes@cimav.edu.mx)  Centro de Investigación en Materiales Avanzados (CIMAV), Miguel de Cervantes 120, Complejo Industrial Chihuahua, Chihuahua 31136 Chihuahua, México

\*Present address: Fondazione Bruno Kessler, Micro Nano Facility, via Sommarive 18, 38123 Trento, Italy

© 2017 The Author(s). Published by Informa UK Limited, trading as Taylor & Francis Group

This is an Open Access article distributed under the terms of the Creative Commons Attribution-NonCommercial-NoDerivatives License (<http://creativecommons.org/licenses/by-nc-nd/4.0/>), which permits non-commercial re-use, distribution, and reproduction in any medium, provided the original work is properly cited, and is not altered, transformed, or built upon in any way.

In all cases, reference to the original source is included. Following standard treatments [7,8,9] physical properties are defined, in linear approximation, by means of constitutive equations (1).

$$Y = K \cdot X \quad (1)$$

Tensor  $X$  (rank  $m$ ) represents the action (cause) on the sample,  $Y$  (rank  $n$ ) is the materials response (effect) and  $K$  ( $m+n$ ) is the linking property. Principal and coupling properties scan several tensor ranks. To decrease the dimensionality of writing tensors of rank equal to or greater than 2, the so-called matrix or compact notation is frequently used.  $3 \times 3$  symmetric matrices (say the stress tensor) are represented as  $6 \times 1$  hypervectors. Piezoelectric and elastic tensors are written, respectively, as  $3 \times 6$  and  $6 \times 6$  matrices. The constitutive equation for the piezoelectric charge coefficients tensor  $d$  is written as follows.

$$P = d \cdot T \quad (2)$$

$$\begin{bmatrix} P_1 \\ P_2 \\ P_3 \end{bmatrix} = \begin{bmatrix} d_{11} & d_{12} & d_{13} & d_{14} & d_{15} & d_{16} \\ d_{21} & d_{22} & d_{23} & d_{24} & d_{25} & d_{26} \\ d_{31} & d_{32} & d_{33} & d_{34} & d_{35} & d_{36} \end{bmatrix} \cdot \begin{bmatrix} T_1 \\ T_2 \\ T_3 \\ T_4 \\ T_5 \\ T_6 \end{bmatrix} \quad (3)$$

$P$  is the electric polarisation and  $T$  is the mechanical stress.

The characterisation of material's symmetry is essential for properties investigation. MPOD is consistent with theoretically derived 'selection rules' for the structure of principal and coupling properties tensors [10,11]. In MPOD, the introduction of new data is performed through a programme that builds the properties matrices, depending on the rank of the considered tensor and according to symmetry. Besides the atomic distribution symmetry, magnetic symmetry may also be taken into account. The polar or axial nature of the property, as well as magnitudes' behaviour under time inversion, is part of the symmetry analysis. This issue is discussed in Fuentes-Cobas et al. [12,13].

The MPOD data files are written in the International Union of Crystallography 'CIF' format. The contents of these files include a link to the original source, the applicable symmetry point group, the measurement technique and conditions and the properties matrices. The user can search files by chemical composition, by phase name or by property. The default output consists of the properties matrices. Commands are available for plotting the properties in the so-called *longitudinal surface representation*. The output screen contains the commands for generating 'STL' files for 3D prints.

We illustrate the conversion from tensor to surface representation through the example of piezoelectricity. The longitudinal piezoelectric surface  $d(\mathbf{h})$  represents

the following. Consider a tensile stress in an arbitrary direction, which we denote  $Ox'_1$ . In tensor notation, we name this stress  $T'_{11}$ . (In compact notation it would be  $T'_1$ ). In a general case, the piezoelectric polarisation that will appear on the crystal will not be parallel to  $Ox'_1$ . It will show several Cartesian components. We focus on  $P'_1$ , the projection of the polarisation along  $Ox'_1$ . We write

$$P'_1 = d'_{111} T'_{11} \quad (4)$$

$d'_{111}$  describes the longitudinal piezoelectric effect. The surface of  $d'_{111}$  is constructed by varying  $Ox'_1$  through all directions in space and plotting for each orientation a point at a distance from the origin proportional to  $d'_{111}$ . The calculation of  $d'_{111}$  starting from the knowledge of the tensor  $d_{ijk}$  is done by means of Equation (5)

$$d(\phi, \beta) = d'_{111} = \sum_{i,j,k} a_{1i} a_{1j} a_{1k} d_{ijk} \quad (5)$$

The coefficients  $a_{1i}$  and analogous are the direction cosines of the direction  $Ox'_1$  relative to Cartesian axes  $Ox_i$  ( $i, j, k = 1, 2, 3$ ).

MPOD contains the equations for plotting the longitudinal surfaces associated with tensor ranks from 2 to 4, polar and axial. Matrices are read in compact notation (two indices) and orientations in space  $\mathbf{h} = (\phi, \beta)$  are characterised by polar ( $\phi$ ) and azimuthal ( $\beta$ ) angles.

The representation of the tensor properties as longitudinal surfaces is useful for the visualisation and the spatial analysis of the properties. An important advantage of this type of representation is that it facilitates the comparative analysis between the structural and the property's symmetries. As a general regularity the following Neumann principle is valid: 'The symmetry of the effect is at least equal to the symmetry of the cause'. In crystal physics the Neumann principle may be stated as follows: *The symmetry group of any macroscopic property must contain the crystal structure point group as a subgroup.*

## MPOD case studies


### Principal interactions in $\text{BaTiO}_3$

$\text{BaTiO}_3$  is registered in the Database as file '1000304.mpod'. The link to the original source leads to the classical report by Berlincourt and Jaffe [14]. The structure point group is 4 mm.

### Dielectric constant $\epsilon_r$

Equation (6) gives the  $\epsilon_r$  tensor and Figure 1 represents the  $\epsilon_r(\mathbf{h})$  surface

$$\epsilon_r = \begin{bmatrix} 2920 & 0 & 0 \\ 0 & 2920 & 0 \\ 0 & 0 & 168 \end{bmatrix} \quad (6)$$

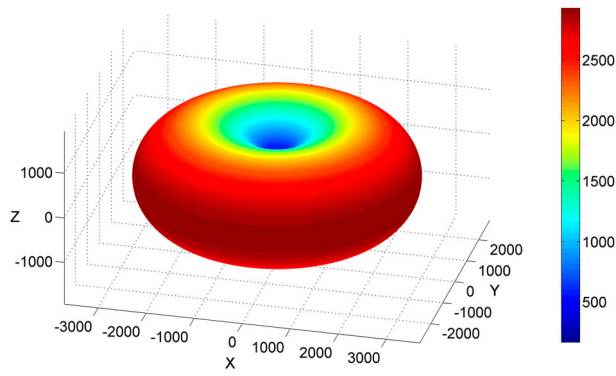

**Figure 1.** BaTiO<sub>3</sub> longitudinal dielectric constant surface. Dielectric constant is a polar second rank tensor. The  $\epsilon_r(\mathbf{h})$  surface wraps the coordinates' origin. The equatorial plane ( $z=0$ ) is a symmetry mirror for the dielectric constant. The property point group is  $\infty/mmm \supset 4mm$ .

### Elasticity

Equation (7) represents the BaTiO<sub>3</sub> elastic compliance tensor (at constant electric field)  $s^E$ . Figure 2(a) shows the longitudinal compliance surface  $s^E(\mathbf{h})$ . Figure 2(b) represents the Young modulus surface  $E(\mathbf{h}) = 1/s^E(\mathbf{h})$ .

$$s^E = \begin{bmatrix} 8.05 & -2.35 & -5.24 & 0 & 0 & 0 \\ -2.35 & 8.05 & -5.24 & 0 & 0 & 0 \\ -5.24 & -5.24 & 15.7 & 0 & 0 & 0 \\ 0 & 0 & 0 & 18.4 & 0 & 0 \\ 0 & 0 & 0 & 0 & 18.4 & 0 \\ 0 & 0 & 0 & 0 & 0 & 8.84 \end{bmatrix} 10^{-12} \text{Pa}^{-1} \quad (7)$$

### Piezoelectricity in BaTiO<sub>3</sub> and quartz

#### BaTiO<sub>3</sub>

Equation (8) represents the  $\mathbf{d}$  tensor for BaTiO<sub>3</sub>. Figure 3 shows the longitudinal piezoelectric surface

$d(\mathbf{h})$ .

$$\mathbf{d} = \begin{bmatrix} 0 & 0 & 0 & 0 & 392 & 0 \\ 0 & 0 & 0 & 392 & 0 & 0 \\ -34.5 & -34.5 & 85.6 & 0 & 0 & 0 \end{bmatrix} \text{pC} \cdot \text{N}^{-1} \quad (8)$$

#### Quartz (100055.mpod)

Piezoelectric tensor  $\mathbf{e}$  for quartz, Equation (9), is taken from Ogi et al. [15]. Tensor  $\mathbf{e}$  is a useful alternative to  $\mathbf{d}$  in textured polycrystals' effective properties calculations [16]. Structure point group is 32. Figure 4 shows the piezoelectric longitudinal surface.


$$\mathbf{e} = \begin{bmatrix} 0.151 & -0.151 & 0 & -0.061 & 0 & 0 \\ 0 & 0 & 0 & 0 & 0.061 & -0.302 \\ 0 & 0 & 0 & 0 & 0 & 0 \end{bmatrix} \text{C} \cdot \text{m}^{-2} \quad (9)$$

### Magnetoelectricity

The constitutive equation for magnetoelectricity is  $\mathbf{P} = \boldsymbol{\alpha} \cdot \mathbf{H}$ . Magnetic field intensity  $\mathbf{H}$  is an axial vector,  $\mathbf{P}$  is polar and the magnetoelectric tensor  $\boldsymbol{\alpha}$  is axial, second rank.


#### LiCoPO<sub>4</sub> (1000360.mpod)

The atomic distribution space group for LiCoPO<sub>4</sub>, at 4.2 K, is  $Pnma$  (point group  $mmm$ ). The magnetic symmetry point group, taking into account the atomic magnetic dipoles orientations is  $mmm'$  [17]. Equation (10), from Rivera and Schmid [18], represents the magnetoelectric tensor. The magnetoelectric longitudinal

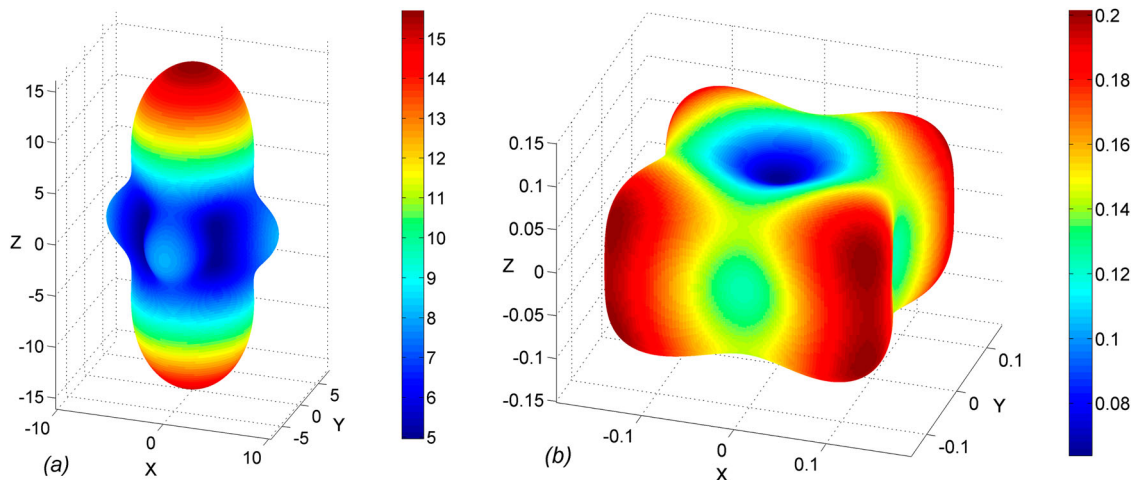


**Figure 2.** BaTiO<sub>3</sub> (a) elastic compliance and (b) Young modulus. Elasticity is described by polar fourth rank tensors. The  $s^E(\mathbf{h})$  and  $E(\mathbf{h})$  surfaces wrap the origin. The equatorial plane is a mirror. The property point group is  $4/mmm \supset 4mm$ .



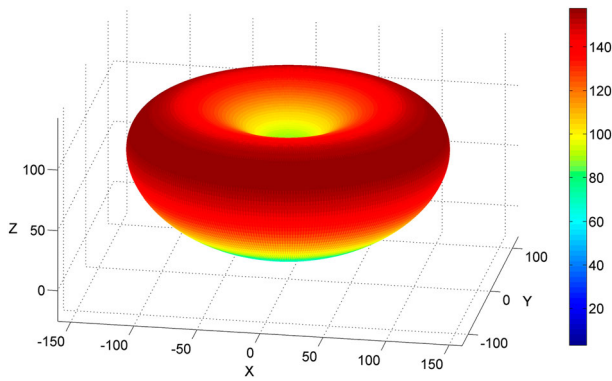

**Figure 3.** Piezoelectric charge constant  $d(\mathbf{h})$  surface for  $\text{BaTiO}_3$ . Piezoelectricity is represented by polar third rank tensors. The  $d(\mathbf{h})$  surface grazes but cannot wrap the origin. The  $z = 0$  plane is not a mirror. Property point group is  $\infty mm \supset 4 mm$ .

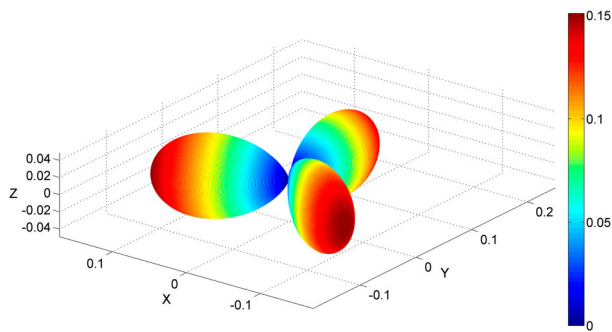

**Figure 4.** Longitudinal piezoelectric surface  $e(\mathbf{h})$  for  $\alpha$ -quartz. The three characteristic 'almonds' graze the origin. The equatorial plane is a mirror. Property point group:  $-6 m2 \supset 32$ .

surface  $\alpha(\mathbf{h})$  is shown as Figure 5.


$$\alpha = \begin{bmatrix} 0 & 18.4 & 0 \\ 30.6 & 0 & 0 \\ 0 & 0 & 0 \end{bmatrix} \text{ ps} \cdot \text{m}^{-1} \quad (10)$$

### 3D printing of properties surfaces


The MPOD graphic interface includes the command to generate 3D print files, in STL format. Figure 6 shows photos of representative 3D impressions.

### The maths behind MPOD

The diversity of geometries observed in the presented figures corresponds to the equally diverse collection of matrices representing physical properties. The physical law underlying this diversity is the aforementioned Neumann principle. The starting point for a property's symmetry analysis is to identify the mathematical nature of the 'cause' ( $\mathbf{X}$ ) and 'effect' ( $\mathbf{Y}$ ) magnitudes involved in the definitions of the considered 'property'  $\mathbf{K}$  (Equation (1)). Any element of a matrix representing a property, say piezoelectric  $d_{24} = 392 \text{ pC N}^{-1}$  in Equations (3) and (8), expresses the effect of an

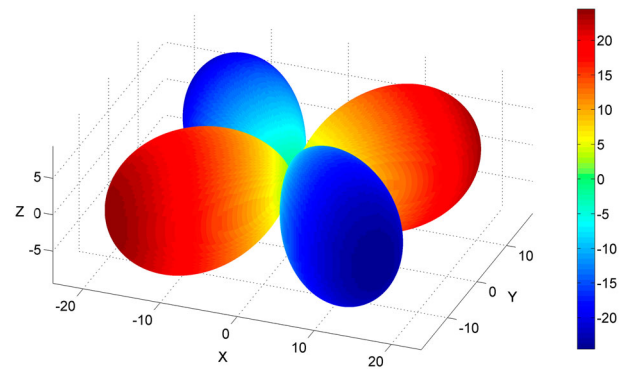

**Figure 5.** Longitudinal magnetoelectric coefficient  $\alpha(\mathbf{h})$ .  $\text{LiCoPO}_4$  single crystal at 4.2 K. The  $mmm'$  magnetic symmetry associated with the axial nature of magnetoelectric coefficients leads to interesting observations: vertical mirror planes ( $xz$ ) and ( $yz$ ) convert positive to negative. Horizontal antimirror ( $xy$ ) plane preserves sign.

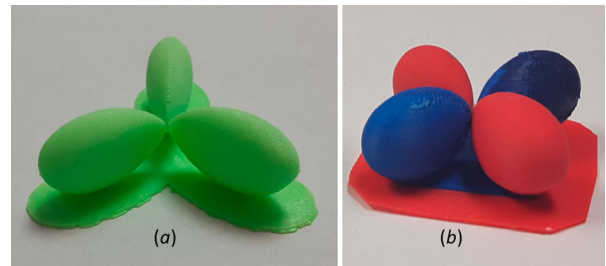

**Figure 6.** MPOD 3D printing of longitudinal properties. (a) Quartz piezoelectricity; (b)  $\text{LiCoPO}_4$  magnetoelectricity. Positive and negative values are observable.

elementary component of the stress [ $T_4$  (matrix) =  $T_{23}$  (tensor) =  $T_{yz}$ ] on one of the elementary components of the polarisation [ $P_2 = P_y$ ].

Let us analyse the relation  $\mathbf{X} \rightarrow \mathbf{Y}$  from the point of view of Neumann's principle, using group theory tools.

An irreducible representation (*irrep*) of a point group contains its characters and bases. The bases represent coordinates or components of polar vectors ( $x, y, z$ ), components of axial vectors ( $R_x, R_y, R_z$ ), tensor components, hypervectors ( $t_1, \dots, t_6$ ) or coordinate products. These bases, under the symmetry operations of the group, are transformed according to the characters of the *irreps* table. An *irrep* characterises the way each operation of a point group acts on the elementary components of vectors and tensors.

Table 1 shows the *irreps* of the  $mm2$  point group. This group represents the symmetry of the water molecule and also of some of the so-called 'Aurivillius

**Table 1.** Irreducible representations for  $mm2$  point group.

$C_{2v}$	E	$C_2(z)$	$\sigma^{xz}$	$\sigma^{yz}$	Representation bases	
					Polar and axial vector components	Hypervector components
$A_1$	1	1	1	1	$z$	$t_1; t_2; t_3$
$A_2$	1	1	-1	-1	$R_z$	$t_6$
$B_1$	1	-1	1	-1	$x, R_y$	$t_5$
$B_2$	1	-1	-1	1	$y, R_x$	$t_4$

ceramics' (an important family of ferro-piezoelectrics). For example, in the  $mm2$  group, the 'x' basis is transformed following the  $B_1$  irrep.

According to the Neumann principle, all properties must satisfy, at least, the symmetry of the structural point group. A property describes the action-response relationship. If a property is symmetrical about a certain rotation, the components of the response to a given action must be transformed in the same way as the components of the action are transformed. Formally, the components of the vectors and/or tensors of action and response must share the same irrep.

We illustrate the related methodology by analysing a case of interest.

### Pyro- and Piezoelectricity in Aurivillius phases

Let us analyse pyro- and piezoelectricity in materials with  $mm2$  symmetry.

We start considering the so-called fully symmetric irrep  $A_1$ . In this irrep, the characters of all the symmetry operations are +1. The z component of any vector remains invariant under all the transformations of this group. Scalars, like temperature, are also invariant under all the operations. The coincidence of z and scalars in  $A_1$  implies that  $mm2$  objects (say, the water molecule) exhibit a spontaneous electric dipole moment, this moment points along the z axis and may depend on the scalar temperature.

Consider now the elements linked with  $A_1$  in the hypervector components column. The stress components  $T_1$ ,  $T_2$  and  $T_3$  are represented there. The coincidence of these tensor components in the same irrep as  $P_3$  (z) implies that there can exist a linear cause-effect relationship. In other words, the coefficients  $d_{31}$ ,  $d_{32}$  y  $d_{33}$  may be different from zero.

Following a similar reasoning it is found that  $d_{15}$  and  $d_{24}$  may also be non-zero. In this way, it is deduced

that the piezoelectric matrix for the  $mm2$  point group has the form given in Equation (11).

$$d = \begin{bmatrix} 0 & 0 & 0 & 0 & d_{15} & 0 \\ 0 & 0 & 0 & d_{24} & 0 & 0 \\ d_{31} & d_{32} & d_{33} & 0 & 0 & 0 \end{bmatrix} \quad (11)$$

The particular case of the Aurivillius compound  $\text{Bi}_2\text{WO}_6$  has been measured by Takeda et al. [19]. His results are reproduced in Equation (12).

$$d = \begin{bmatrix} 0 & 0 & 0 & 0 & 46 & 0 \\ 0 & 0 & 0 & 24 & 0 & 0 \\ -17 & -4.4 & 27 & 0 & 0 & 0 \end{bmatrix} \text{pC} \cdot \text{N}^{-1} \quad (12)$$

Figure 7 shows the piezoelectric surface of  $\text{Bi}_2\text{WO}_6$ .

### Conclusions

Crystal thermo-electro-magneto-elastic couplings exhibit a wide spectrum of anisotropic responses, linked with structural and magnetic symmetry, polar and axial nature of magnitudes and tensor ranks.

MPOD (<http://mpod.cimav.edu.mx>) is an open database that delivers measured materials properties in matrix, surface and 3D printing descriptions.

Properties' data in MPOD are computer processed, based on tensor analysis and group theory criteria.

### Disclosure statement

No potential conflict of interest was reported by the authors.


### Funding

Support from Consejo Nacional de Ciencia y Tecnología – CONACYT, Project 257912 "Representación y pronóstico de las propiedades físicas de los materiales mono- y policristalinos", is recognised. This project has received funding from the European Union's Horizon 2020 research and innovation program under grant agreement No. 689868, SOLSA project.

### ORCID


Luis E. Fuentes-Cobas  <http://orcid.org/0000-0001-6063-3967>

Daniel Chateigner  <http://orcid.org/0000-0001-7792-8702>

María E. Fuentes-Montero  <http://orcid.org/0000-0002-3388-8224>

### References

- [1] Landolt H, Börnstein R, Fischer H, et al. Landolt-Börnstein: numerical data and functional relationships in science and technology. New York: Springer; 1987.
- [2] De Jong M, Chen W, Angsten T, et al. Charting the complete elastic properties of inorganic crystalline compounds. Scientific Data. 2015;2:9–21.
- [3] De Jong M, Chen W, Geerlings H, et al. A database to enable discovery and design of piezoelectric materials. Scientific Data. 2015;2:53–65.

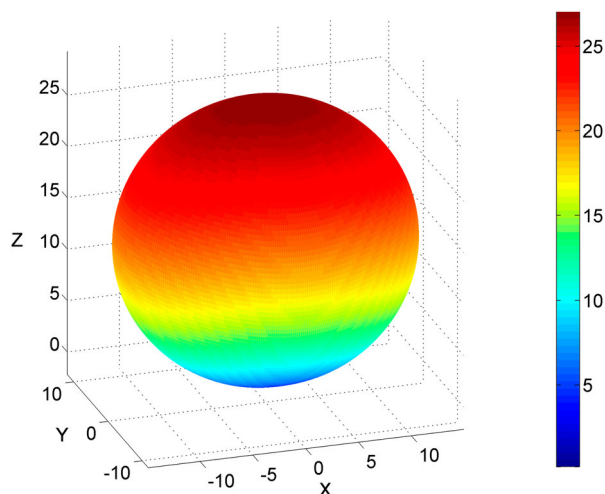

**Figure 7.** Longitudinal piezoelectric coefficient  $d(h)$ .  $\text{Bi}_2\text{WO}_6$  single crystal at room temperature. Structure and property point group:  $mm2$ .

- [4] Kaminsky W. WinXMorph: a computer program to draw crystal morphology, growth sectors and cross sections with export files in VRML V2. 0 utf8-virtual reality format. *J Appl Crystallogr.* **2005**;38:566–567.
- [5] Pepponi G, Gražulis S, Chateigner D. MPOD: a material property open database linked to structural information. *Nucl Instrum Methods Phys Res B.* **2012**;284:10–14.
- [6] Fuentes-Cobas L, Chateigner D, Pepponi G, et al. Poster presentation. *Acta Cryst.* **2014**;70:C1039.
- [7] Newnham RE. *Properties of materials: anisotropy, symmetry, structure.* New York: Oxford University Press on Demand; **2005**.
- [8] Fuentes L. Magnetic-coupling properties in polycrystals. *Textures Microstruct.* **1998**;30:167–189.
- [9] Bunge H-J. *Texture analysis in materials science: mathematical methods.* New York: Elsevier; **2013**.
- [10] Nye J. *The physical properties of crystals.* Oxford, UK: Oxford University Press; **1985**.
- [11] Nowick AS. *Crystal properties via group theory.* New York: Cambridge University Press; **1995**.
- [12] Fuentes-Cobas L, Matutes-Aquino J, Fuentes-Montero M. Magnetoelectricity. In: Buschow KHJ, editor. *Handbook of magnetic materials.* 19. Amsterdam: Elsevier; **2011**. p. 129–229.
- [13] Fuentes-Cobas L, Matutes-Aquino J, Botello-Zubiate M, et al. Advances in magnetoelectric materials and their application. *Handb Magn Mater.* **2015**;24:237–322.
- [14] Berlincourt D, Jaffe H. Elastic and piezoelectric coefficients of single-crystal barium titanate. *Phys Rev.* **1958**;111:143–148.
- [15] Ogi H, Ohmori T, Nakamura N, et al. Elastic, anelastic, and piezoelectric coefficients of  $\alpha$ -quartz determined by resonance ultrasound spectroscopy. *J Appl Phys.* **2006**;100:053511.
- [16] Fuentes-Cobas LE, Muñoz-Romero A, Montero-Cabrera ME, et al. Predicting the coupling properties of axially-textured materials. *Materials.* **2013**;6:4967–4984.
- [17] Brown PJ, Forsyth JB, Tasset F. Studies of magnetoelectric crystals using spherical neutron polarimetry. *Solid State Sci.* **2005**;7:682–689.
- [18] Rivera J-P, Schmid H. Search for the piezomagneto-electric effect in  $\text{LiCoPO}_4$ . *Ferroelectrics.* **1994**;161: 91–97.
- [19] Takeda H, Han JS, Nishida M, et al. Growth and piezoelectric properties of ferroelectric mono-domain crystals. *Solid State Commun.* **2010**;150:836–839.