



Primary production assessment on eco-engineering infrastructures: English Channel case study

P Claquin, Baptiste Vivier, M Navon, A Rusig, I Mussio, L Chasselin, M Deloor, Jean-Claude Dauvin, M Boutouil, Francis Orvain

► To cite this version:

P Claquin, Baptiste Vivier, M Navon, A Rusig, I Mussio, et al.. Primary production assessment on eco-engineering infrastructures: English Channel case study. IOP Conference Series: Materials Science and Engineering, 2022, 1245 (1), pp.012011. 10.1088/1757-899x/1245/1/012011 . hal-03770402

HAL Id: hal-03770402

<https://normandie-univ.hal.science/hal-03770402>

Submitted on 6 Sep 2022

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

PAPER • OPEN ACCESS

Primary production assessment on eco-engineering infrastructures: English Channel case study

To cite this article: P Claquin *et al* 2022 *IOP Conf. Ser.: Mater. Sci. Eng.* **1245** 012011

View the [article online](#) for updates and enhancements.

You may also like

- [The \$\alpha\$ -decay of \$^{21}\text{Na}\$](#)
N L Achouri, J C Angélique, G Ban et al.
- [Study of low energy ion-atom collisions using a magneto-optical trap](#)
A Leredde, P Barragan, A Cassimi et al.
- [A new MOTRIMS apparatus for high resolution measurements in ion-atom collisions and trapped atoms studies](#)
J Blieck, X Fléhard, A Cassimi et al.



The Electrochemical Society
Advancing solid state & electrochemical science & technology

242nd ECS Meeting

Oct 9 – 13, 2022 • Atlanta, GA, US

Early hotel & registration pricing
ends September 12

Presenting more than 2,400
technical abstracts in 50 symposia

The meeting for industry & researchers in

BATTERIES
ENERGY TECHNOLOGY
SENSORS AND MORE!



Register now!



ECS Plenary Lecture featuring
M. Stanley Whittingham,
Binghamton University
Nobel Laureate –
2019 Nobel Prize in Chemistry



Primary production assessment on eco-engineering infrastructures: English Channel case study

P Claquin^{1,2,3}, B Vivier^{1,2,3}, M Navon^{1,2,3}, A M Rusig^{1,2,3}, I Mussio^{1,2,3}, L Chasselin^{1,3}, M Deloor^{1,2,3}, J C Dauvin^{1,4}, M Boutouil⁵, F Orvain^{1,2}

¹ Normandie Université, Université de Caen Normandie, F-14032, Caen, France

² Laboratoire Biologie des ORGANismes et Ecosystèmes Aquatiques (BOREA, UMR CNRS 8067), Muséum National d'Histoire Naturelle, Sorbonne Université, Université de Caen Normandie, IRD 207, Université des Antilles. Centre de Recherches en Environnement Côtier (CREC) - Station Marine, BP49, 54, rue du Docteur Charcot - 14530 Luc-sur-Mer, France

³ Centre de Recherches en Environnement Côtier (CREC) - Station Marine de l'Université de Caen Normandie, BP49, 54, rue du Docteur Charcot - 14530

⁴ Laboratoire Morphodynamique Continentale et Côtière, UMR CNRS 6143 M2C, Normandie Université, Université de Caen Normandie, UNIROUEN, 24 rue des Tilleuls, F-14000 Caen, France

⁵ Ecole Supérieure d'Ingénieurs des Travaux de la Construction de Caen (ESITC Caen), 14610 Epron, France

Email: pascal.claquin@unicaen.fr

Abstract. In the Marineff project, experimental eco-engineering dyke modules were immersed in 2020 in the Bay of Cherbourg (English Channel). Eco-engineering and classic dyke modules were compared regarding biodiversity and productivity. This paper presents the monitoring strategy of primary production assessment applied. Primary production assessment was performed by coupling various techniques in order to consider all the compartments of primary producers present on the dykes and in the associated surrounding water mass. Seaweeds, microphytobenthos and phytoplankton were studied. Benthic chambers measuring oxygen and pCO₂ under controlled light, and techniques based on variable fluorescence were applied on eco-engineering and classic dyke modules. Preliminary results are presented in order to illustrate the expected indicator and methodology improvement and limits were discussed. The whole data set will allow us to explore the relationship between productivity and biodiversity as a function of the sites and of the nature of the infrastructure, eco-engineering or not. At this stage of our study we pointed out that the macroalgae were 7.9 times more productive than biofilm per surface on eco-engineering module whilst only 1.5 times on classic module. Smooth surface appeared to favour biofilm productivity at this stage of colonisation while rough surface drove more quickly the system to a production dominated by macroalgae.

1. Introduction

Coastal artificialisation is a widespread phenomenon that leads to irreversible loss in many ecosystems. Artificialisation is a highly visible footprint of anthropic activities related to commercial exchanges, energy production, fisheries, tourism, leisure activities, etc. A reduction of this footprint is required but is socially and economically complex [1, 2]. Marine eco-engineering infrastructures can limit negative effects and enhance the ecological status of artificialized areas [2]. Artificialisation of shallow coastal ecosystems by marine infrastructures offers new substrates for benthic microalgae and macroalgae which may increase local primary production [1]. Primary production is at the base of trophic network and drives many chemical cycles at local and global scales [3-6]. Oxygenic primary production, which



represents the production of chemical energy in organic compounds by photosynthetic organisms is one of the major ecological functions of ecosystem in photic area [7, 8]. Macroalgae (i.e. seaweeds) which belong to three phyla or classes, Ulvophyceae (Chlorophyta - green algae), Rhodophyta (red algae) and Phaeophyceae (Ochrophyta - brown algae); microalgae which regroups 10 eukaryotic phyla including various taxa like diatoms, dinoflagellates, Prymnesiophyceae [9], seagrasses (Angiosperm) and Cyanobacteria which belong to prokaryotes represent a very large biodiversity of primary producers. The functioning of these ecosystems and the interaction between benthic flora and fauna influence also the phytoplankton of water masses surrounding [2, 10]. An assessment of the whole primary production related to artificial infrastructure is then required to characterize the functioning and the ecological trajectories of these new ecosystems [1, 2]. Methods allowing primary production measurements of the different components of primary producers have to be deployed in parallel. Several technics based on O_2 , CO_2 , carbon isotopes, or fluorescence variations measurements were commonly used to assess primary production [11, 12]. Coupling different technics allow to consider various organisms and processes as a function of the primary producer size and time scale. In this context, marine eco-engineering infrastructures were developed to improve ecological impacts of artificialized areas [1, 2]. In the European INTERREG Va MARINEFF project, experimental eco-engineering dyke modules and classic modules were immersed in September 2020 in the bay of Cherbourg and a monitoring of primary production dynamics was initiated. In the present paper the selected main protocols are briefly described and preliminary results are presented and discussed.

2. Materials & methods

2.1. Sampling site

Twelve dyke modules were immersed into 10 m depth on sandy soft bottom in the bay of Cherbourg in September 2020. Two types were deployed: six classic modules corresponding to concrete cubes of 1.7 m^3 with smooth external texture (Figure 1a) and six eco-engineering modules corresponding to concrete cube of 1.7 m^3 with rough external texture and various holes, gutters, overhangs, grooves of various sizes and positions to promote biological colonisation (Figure 1b, Figure 2). Eco-engineering modules were designed by MARINEFF project patterns (University of Caen Normandie, TPC - VINCI Construction France, and ESITC) and produced by TPC - VINCI Construction France.

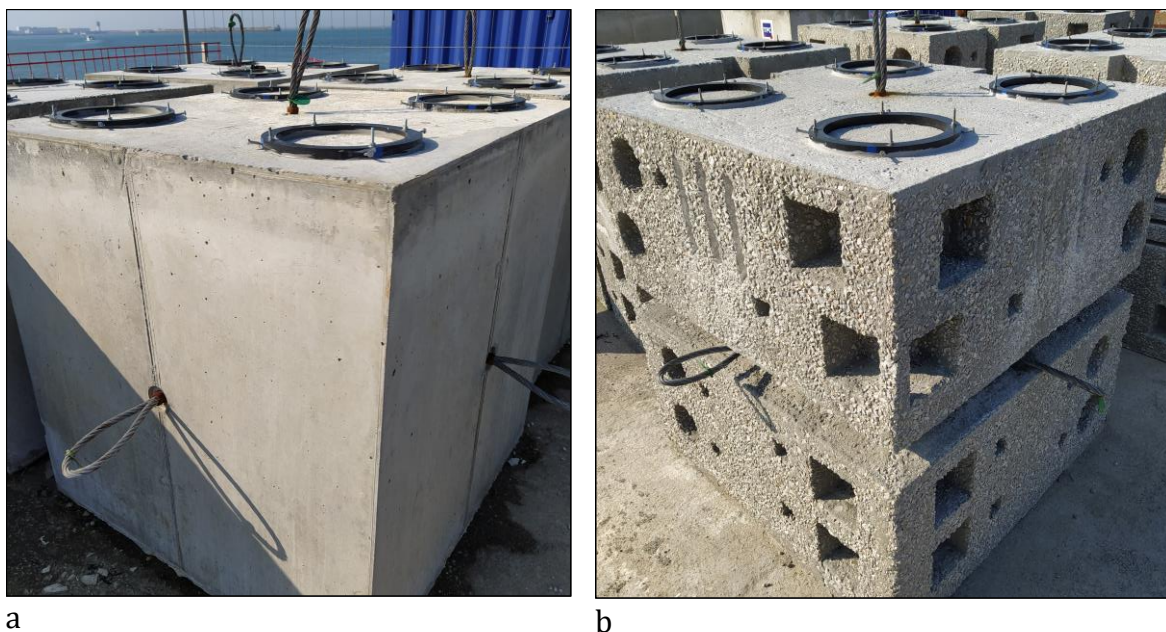


Figure 1. Dyke modules deployed during the MARINEFF project: a: classic module; b: Eco-engineering module.

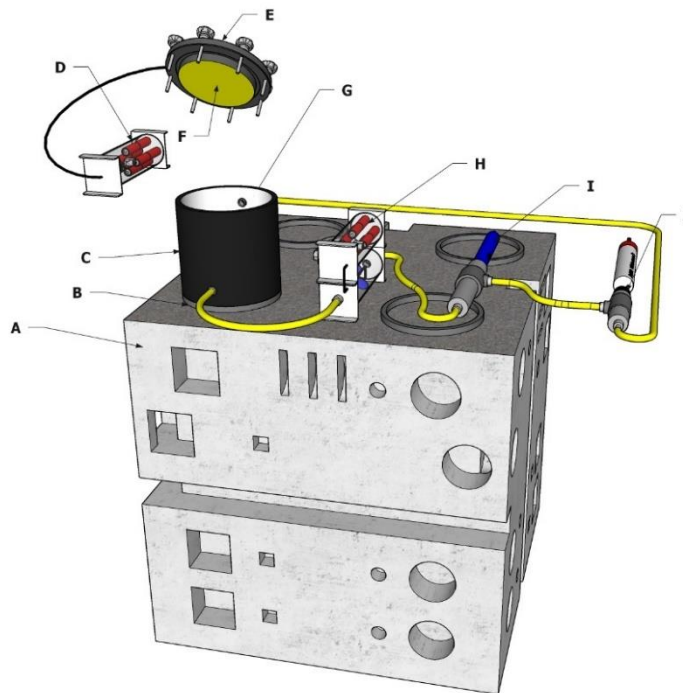


Figure 2. Automated benthic chamber for primary production measurement. (A) MARINEFF eco-engineering dyke module with the mooring ring (B) to fix the benthic chamber (C). Aluminium tape (G) covers the benthic chamber inside. LED panel (F) is fixed to the benthic chamber top (E) which is screwed on the benthic chamber to close it hermetically. The LED panel is driven by the LED controller (D). Water flow is generated by an underwater pump (H). Two sensors, YSI EXO 1 (I) with oxygen probe, and Turner Design C-Sense pCO₂ probe (J) driven by the RBR Virtuoso3 logger (J), measures the gas concentration. The whole system is in a water closed circuit connected by pipe.

2.2. Primary production assessments (Figure 3)

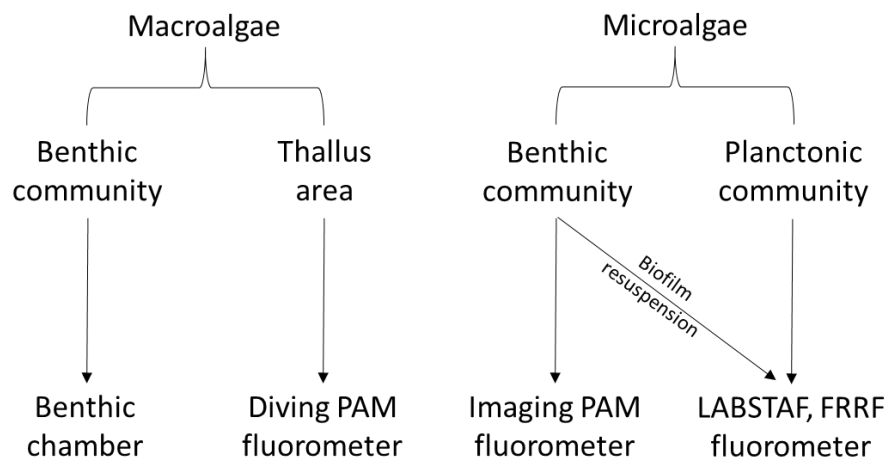


Figure 3. Monitoring strategy deployed for primary production assessment on eco-engineering infrastructures during the MARINEFF project.

2.2.1. Benthic chamber. A fully automated system for measurements of photosynthetic oxygen and CO₂ exchange was developed in the MARINEFF project (Figure 2). The benthic chamber allows generating light gradient between 0 to 900 $\mu\text{mol photons m}^{-2} \text{s}^{-1}$ produced by white LEDs with maximum pics at 450 nm and 600 nm (Figure 4). Light intensity and the duration of each light step are

controlled by a programmable controller unit. Photoactive radiation (PAR) intensity of each step was measured using a RBR solo3 PAR logger connected to a Li-COR “Underwater Quantum Sensor” LI-192. Dissolved oxygen was recorded with an EXO Optical Dissolved Oxygen Sensor and pCO₂ by a Turner Designs C-sense pCO₂ probe every 30 seconds. Temperature and pH were measured at the same frequency in the chamber. A pump guaranteed the water homogenisation during the incubations. In the present experiment, 7 light steps of 15 min each from 0 to 750 $\mu\text{mol photons m}^{-2} \text{s}^{-1}$ were applied. A dark phase was applied after the last light step in order to estimate the respiration rate. Because O₂ evolution consumption in the light, may differ from dark O₂ consumption, the respiration rate was estimated during 5 min just after the last light phase [13]. O₂ measurements were used to estimate respectively net primary production (NPP) and benthic community respiration (BCR) of the phyto- and zoo-benthos community [14]. GPP was then calculated from NPP and BCR measurements ($\text{GPP} = \text{NPP} + \text{BCR}$). pCO₂ measurements have to be associated to alkalinity and/or DIC measures at the beginning and at the end of incubations to be properly exploited [15]. This step of the experiments is not presented in this paper.

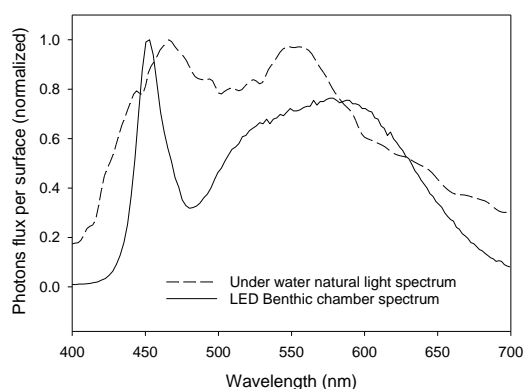


Figure 4. LED spectrum used in the automated benthic chamber and under water natural light spectrum.

2.2.2. Variable fluorescence measurements

2.2.2.1. Chlorophyll- *a* fluorescence induction pulse amplitude modulation (PAM). Diving and imaging PAM (WaltzTm, Effeltrich, Germany) are used in the assessment protocol. Imaging PAM is not present in this paper. See Vivier et al. [16] for more details. The maximum quantum yield (F_v/F_m in the dark) and the effective photochemical efficiency (F_q'/F_m' in the light), were measured on the module by scuba divers on several species of macroalgae using a Diving PAMII (WaltzTm, Effeltrich, Germany) [17]. The macroalgae sample placed in the dark was excited by a weak blue measuring light ($1 \mu\text{mol m}^{-2} \text{s}^{-1}$, 474 nm, frequency 0.6 kHz) to record minimum fluorescence (F_0). The optical fiber of the PAM was positioned exactly 5 mm from the surface of the macroalgae. Maximum fluorescence (F_m) was measured using a multiple turnover flash method [17]. We used a saturating blue light pulse (0.6 s, $4000 \mu\text{mol m}^{-2} \text{s}^{-1}$ at 474 nm) produced by a LED allowing reduction of the quinone A (QA), quinone B (QB) and part of plastoquinone (PQ) pools.

F_v/F_m was calculated according to the following equation [18]:

$$\frac{F_v}{F_m} = \frac{(F_m - F_0)}{F_m}$$

The samples were exposed to 10 irradiances (E) from 0 to $1000 \mu\text{mol photons m}^{-2} \text{s}^{-1}$ at 474 nm for 20 seconds at each step. Steady state fluorescence (F_s) and maximum fluorescence (F_m') were measured. The effective quantum efficiency of PSII for each irradiance was determined as follows [18]:

$$\frac{\Delta F}{F_m'} = \frac{(F_m' - F_s)}{F_m'}$$

The electron transport rate (ETR, $\mu\text{mol electrons m}^{-2} \text{s}^{-1}$) was calculated for each irradiance as described by Figueroa et al. [19]. ETR is a measure of the rate of linear electron transport through photosystem II, which is correlated with the overall photosynthetic performance of the algae. In order to properly estimate the ETR, light absorption (A) has to be measured in laboratory on sample collected on dyke modules.

$$ETR(E) = AQ_{\lambda} \times FII \times \frac{\Delta F}{F_m}$$

Where AQ_{λ} is the absorbed quanta calculated as the product of the integration of the spectral absorbance (A_{λ}) between 400-700 nm and spectral irradiance of the light source (E_{λ}), FII is the fraction of AQ directed to PS II including its light harvesting complexes. FII for Rhodophyta is about 0.15 and 0.5 for Ulvophyceae and Phaeophyceae [19-21]. The absorbance (A_{λ}) was determined for each 0.5 nm between 400 and 700 nm by means of an integrating sphere installed in a Shimadzu UV2600i spectrophotometer [19]. Fluorescence excitation spectra from 400 to 700 nm with emission measured at 730 nm was performed using a Shimadzu Spectrofluorometer RF-6000 [19].

2.2.2.2. LabSTAF fluorometer. Photosynthetic parameters of the phytoplankton and of the resuspended microalgal biofilm were determined by using a LabSTAF (Chelsea Technologies, UK) fluorimeter. The microalgal biofilm was collected by scuba divers using a syringe of 1.66 L specially designed for this sampling. 25 cm^2 were resuspended using toothbrush and drawn into the syringe. The LabSTAF allows measurements at different wavelengths. A single turnover (ST) saturation phase is delivered with a solid flash of 100 μs to measure minimal and maximum fluorescence as described in Boatman et al. (2019) [22]. Samples were exposed to 12 intensities of increasing PAR (0 – 1,500 $\mu\text{mol photon. s}^{-1}.\text{m}^{-2}$) with 30-second intervals in order to obtain fluorescent-light curve (FLC). The Labstaf enables to measure the electron flux from the PSII per volume unit (JV_{PII} , $\text{mmol electrons m}^{-3} \text{h}^{-1}$) which allowed to estimate the oxygen production (GO_{PII}) in $\text{mmol O}_2 \text{m}^{-2} \text{h}^{-1}$.

$$JV_{PII} = a_{LHII} \times rETR$$

With a_{LHII} the absorption coefficient of PSII in m^{-1} (see Boatman et al. (2019) [22] for details). The LabSTAF also allows to measure the absorption cross section of PSII, Sigma_{PSII} ($\text{nm}^2.\text{PSII}^{-1}$) at different wavelengths. The same measurements were performed on water samples around modules in order to estimate the phytoplankton production. A correction was then applied on microalgal biofilm measurements which are slightly contaminated by phytoplankton during sampling.

2.2.3. Production / Light curves. The GPP, ETR and GO_{PII} were plotted against light (PAR) produced respectively by the benthic chamber, the Diving PAM and the LabSTAF. To estimate photosynthetic parameters, the mathematical model of Webb et al. (1974) [23] was applied to the data:

$$X(PAR) = X_{max} \times e^{(1 - \frac{PAR \times \alpha_X}{X_{max}})}$$

where X (PAR) is GPP (PAR), ETR (PAR) or GO_{PII} (PAR). X_{max} is the maximum photosynthetic capacity measured with the O_2 incubation method (GPP_{max} in $\text{mmol O}_2 \text{m}^{-2} \text{h}^{-1}$), the PAM method (ETR $_{max}$ in $\mu\text{mol electrons m}^{-2} \text{s}^{-1}$) or with LabSTAF ($GO_{PII_{max}}$, $\text{mmol O}_2 \text{m}^{-2} \text{h}^{-1}$), α is the photosynthetic efficiency which corresponds to the slope of each Production / Light curve.

3. Results & Discussion

This paper presents the strategy deployed to measure the primary production of the different component of artificial infrastructure installed in a photic zone of a macrotidal epicontinental sea. The benthic chamber which was developed in this context allowed to standardize light exposure of the macroalgae community during incubation. Traditionally transparent benthic chambers were used [24]

and the results obtained were highly dependent on the daily irradiance which could change from one day to the next and between seasons [14, 24]. The automated benthic chamber used in this study is easily installed by scuba divers and enabled reproducible experiments regarding light exposure. The figures 5a and 5b showed that light energy of the benthic chamber allowed to reach a saturation of GPP which was required to properly fit a Webb model in order to estimate the GPP_{max} and the photosynthetic efficiency α . This preliminary result showed a higher maximal production rate (GPP_{max} = 14.18 ± 2.19 mmol O₂ m⁻² h⁻¹) and a higher α (0.12 ± 0.03 mmol O₂ m⁻² h⁻¹ (μmol photons m⁻² s⁻¹)⁻¹) for Eco-engineering modules than for classic module (GPP_{max} = 8.88 ± 0.62 mmol O₂ m⁻² h⁻¹; $\alpha = 0.06 \pm 0.008$ mmol O₂ m⁻² h⁻¹ (μmol photons m⁻² s⁻¹)⁻¹) (Figure 5a). Biomass measurements confirmed a higher covering on eco-engineering modules (405.8 g m⁻²) than on classic modules (256.0 g m⁻²). The productivity per biomass unit is comparable between both types of modules, with GPP_{max} per weight of 34.96 ± 6.04 μmol O₂ g⁻¹ h⁻¹ and α 0.32 ± 0.09 for eco-engineering modules and GPP_{max} per weight of 34.63 ± 2.44 μmol O₂ g⁻¹ h⁻¹ and α 0.25 ± 0.03 for classic modules (Figure 5b). The equal value of productivity firstly validated our protocol with this new benthic chamber and secondly showed that the advantage of engineering modules is related to fixation success of macroalgae and on the efficiency of the colonisation on rough substrate instead of smooth one [25]. The measurements using benthic chambers will be performed 4 times per year in triplicate on both module types.

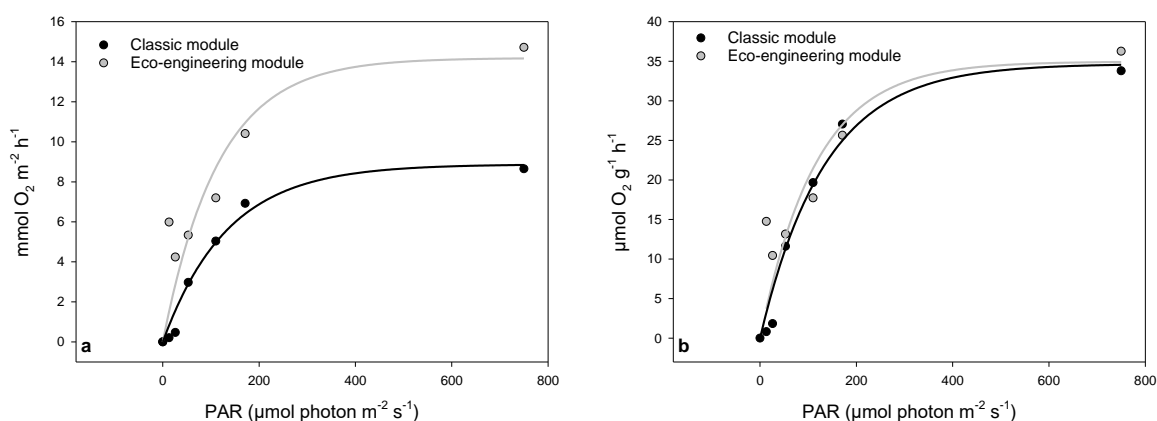


Figure 5. Example of Production / Light curves measured on MARINEFF eco-engineering dyke module and classic dyke module in the Bay of Cherbourg in April 2021. Dots show the GPP measurements at each light intensity (PAR) and the lines show the Webb model fits. a: GPP expressed as a function of subtract surface and time; b: GPP expressed as a function of fresh weight of macroalgae and time.

In addition to benthic chamber experiments, diving PAM measurements were used to estimate photosynthetic parameters *in situ*. GPP estimation gave a production capacity of the whole community while PAM measurements allowed to measure photosynthetic parameters and productivity capacity individually for each species [26] and/or for different parts of thallus for massive species. PAM techniques provide a non-destructive way of assessing the photo-physiology of a range of organisms, including phytoplankton, macroalgae and higher plants. A number of works have used chlorophyll-*a* fluorescence techniques to study the photosynthetic characteristics of macroalgae, both in the field and in the laboratory [21, 27-30]. In the present study, several species of green, brown and red algae were measured (*Saccorhiza polyschides*, *Dictyota dichotoma*, *Gracilaria gracilis*, *Palmaria palmata*, *Cryptopleura ramosa*, *Ulva lactuca*, *Bryopsis plumosa*) and regrouped as a function of their phylum. Comparison of PAM measurements from different species should be conducted with care, as the irradiance absorption of a photosynthetic organism may change, affecting ETR. As shown in the example presented in figure 6, absorption spectra are highly variable as a function of pigment composition. Absorption spectrum are then required to properly estimate ETR as presented in figure

7a. This absorption spectrum can be improved by using excitation spectrum measurements [19]. According to the literature FII can vary between 0.15 for red algae to 0.5 for green algae [30]. ETR and alfa were significantly higher in brown algae than in red and green. The data were spectrally corrected and brown algae showed a high absorption at 474 nm with high efficiency for the major light-harvesting complex of photosystem II at this wavelength while red algae had a poor light transfer to PSII at this wavelength.

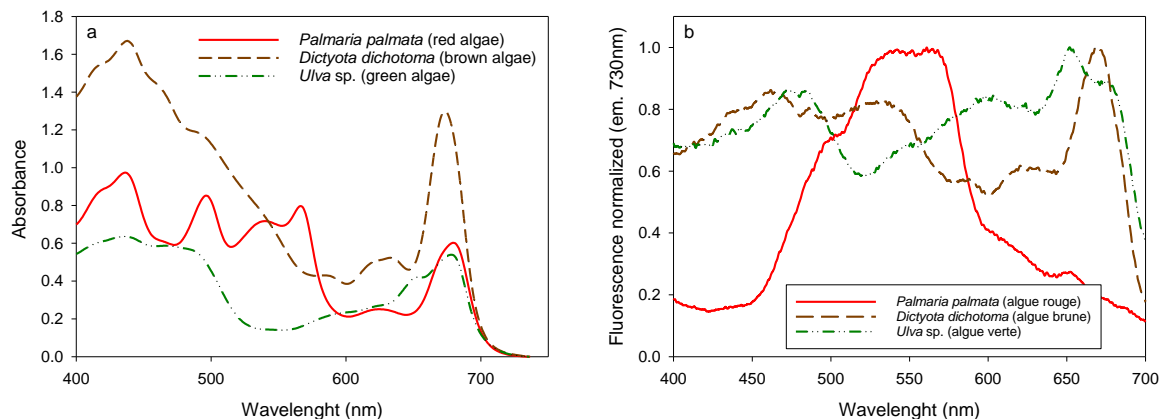


Figure 6. a: Example of spectral absorbance (A_λ) between 400-700 nm and b: Example of fluorescence excitation spectra between 400-700 nm with an emission measured at 730 nm performed on Chlorophyta (green algae), Rhodophyta (red algae) and Phaeophyceae (brown algae) from the Bay of Cherbourg.

The value of ETR are in accordance with literature [30] but calculation of this parameter is very heterogeneous in literature. Beside relative ETR (rETR) [31] measurements, calculation of ETR per unit surface as a function of time are conducted in different ways in literature [26, 27, 30, 32]. The way how to calculate the absorption can change or a standard factor can be applied [32], FII can be considered as variable as a function of pigment groups ([17, 19, 20, 30] or constant for all groups [26, 32]. According to our knowledge the approach proposed by Figueroa et al [19] followed the same principle as described by Johnsen & Sakshaug [33] for phytoplankton. This method which required a determination of absorption factor using an integrative sphere and a determination of FII by using spectrofluorimetry measurements will be applied in our monitoring strategy. Beside producing indicator, such an approach allows to explore ecophysiological regulation of light absorption as a function of environmental parameters. The Fv/Fm obtained for green and brown algae are found in healthy algae, well acclimated to their environment. The lowest value obtained on red algae is probably partly due to pigment composition and is in accordance with literature [32]. The response of red algae to PAM fluorometry techniques can be different from responses in other algae groups due to the presence of phycobilisomes in the photosynthetic apparatus [34, 35]. State transition mechanisms frequently observed in red algae can influence the Fv/Fm [32, 36-38]. We did not exempt to have differences on photosynthetic parameters between the same species collected from eco-engineering modules or classic modules at this stage of the monitoring. If biomass remained significantly higher for longer, the shading due to algae canopy would lead to a discrepancy of algae photoacclimation and possibly of biodiversity and community structures between both types of module.

The microalgal biofilm was also studied in this project. Colonisation of hard substrates by microalgal biofilm is a crucial step for the ecological succession of new hard substrata [16, 39]. Imaging PAM is used to follow the colonisation on small samples of module fixed on dyke modules which are regularly collected [16]. This approach is not detailed in the present paper. As described in the Material and Method section, 25 cm² of biofilm were resuspended and analysed using a LabSTAF (Figure 7b).

Contrary to macroalgae, the biofilm of classic modules was more productive. The $GO_{II\max}$, which correspond to GPP max of macroalgae, was $5.89 \pm 0.65 \text{ mmol O}_2 \text{ m}^{-2} \text{ h}^{-1}$ for classic module and $1.79 \pm 1.07 \text{ mmol O}_2 \text{ m}^{-2} \text{ h}^{-1}$ for eco-engineering module. Biofilm from classic modules also presented a higher Fv/Fm than biofilm from eco-engineering modules. We pointed out that the absorption cross-section of the PSII was also different, which indicated variation of photoacclimation process or difference on community structure [40, 41]. Analysis of the biofilm community structure is still in process by coupling microscopic and molecular approaches. The higher biomass observed on eco-engineering module probably influenced the biofilm production capacities and its acclimation as a function of light and nutrients. The interactions between microalgal biofilm and macroalgae as well as the temporal variations on these interactions will be a major point of the future data analyses. These first data allowed to compare the primary production of macroalgae and microalgal biofilm. The macroalgae were 7.9 times more productive than biofilm per surface on eco-engineering module whilst only 1.5 times on classic module. Smooth surface appeared to favour biofilm productivity at this stage of colonisation while rough surface drove more quickly the system to a production dominated by macroalgae.

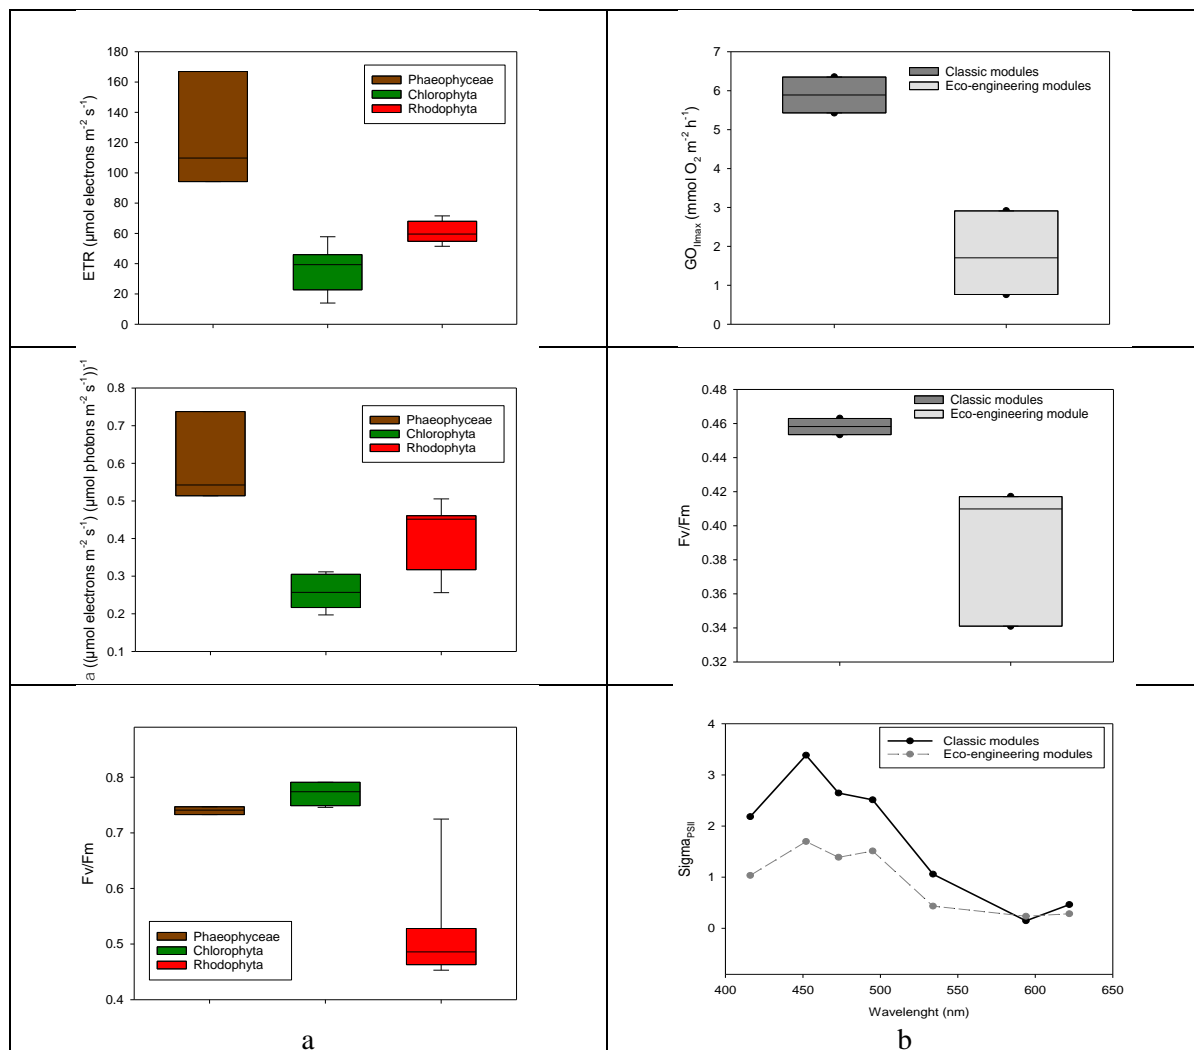


Figure 7. a: ETR, α and Fv/Fm measured under water by using Diving PAMII on the dykes modules on Chlorophyta (green algae), Rhodophyta (red algae) and Phaeophyceae (brown algae). b: $GO_{II\max}$,

Fv/Fm, and Sigma PSII measured on microalgal biofilm by using LabSTAF. Measurements were performed in the Bay of Cherbourg in April 2021

4. Conclusion

At the preliminary stage of our monitoring, the sampling and lab protocols deployed were validated. The selection of indicators and their metrics have to be confirmed and some complementary data are required to properly interpret all these first data. We observed differences regarding macro and microalgae primary production. There was no significant difference between productivity of macroalgae ($GPP \cdot g^{-1} \cdot h^{-1}$) measured on eco-engineering and classic modules (ANOVA, $p = 0.967$), because productivity is controlled by environmental parameters like nutrients and light availability while biomass beside productivity capacities also depends on the rate of fixation efficiency. The higher biomass observed on eco-engineering led to a higher GPP per surface unit. For equal surface, at this preliminary stage of our study, eco-engineering modules appeared more productive than classic modules. The monitoring will allow us to increase the replication of these experiments and to confirm or not this trajectory for longer period. The colonization surface of classic module may catch up after several months or years. Competition for space with macrofauna will be also an important point to consider in our monitoring [42]. The primary production estimations will be used in an ecological model. The approach exposed in this work will also allow providing guidelines and efficient protocols to assess primary production in artificial structures and to produce indicators of this main ecology function.

Acknowledgments

The results were obtained in the collaborative project Interreg Va MARINEFF, selected under the European Cross-border Program INTERREG FMA, and co-funded by the ERDF. The authors wish to thank the co-financiers and all project partners for their support. The authors thank the Normandy Region for funding the IMAGING-PAM and LabSTAFF (CPER Manche 2021). The authors thank D Lemeille and J P Lehodey from the CREC-UniCaen for their technical supports.

References

- [1] Vivier B, Dauvin J-C, Navon M, Rusig A-M, Mussio I, Orvain F, Boutouil M and Claquin P 2021 Marine artificial reefs, a meta-analysis of their design, objectives and effectiveness *Global Ecology and Conservation* **27** e01538
- [2] Layman C A and Allgeier J E 2020 An ecosystem ecology perspective on artificial reef production *J. Appl. Ecol.* **57** 2139-48
- [3] Cloern J E, Foster S Q and Kleckner A E 2014 Phytoplankton primary production in the world's estuarine-coastal ecosystems *Biogeosciences* **11** 2477-501
- [4] Underwood G J C and Kromkamp J 1999 *Advances in Ecological Research, Vol 29: Estuaries*, ed D B Nedwell and D G Raffaelli pp 93-153
- [5] Falkowski P G, Barber R T and Smetacek V 1998 Biogeochemical controls and feedbacks on ocean primary production *Science* **281** 200-6
- [6] Field C B, Behrenfeld M J, Randerson J T and Falkowski P 1998 Primary production of the biosphere: Integrating terrestrial and oceanic components *Science* **281** 237-40
- [7] Cardinale B J, Matulich K L, Hooper D U, Byrnes J E, Duffy E, Gamfeldt L, Balvanera P, O'Connor M I and Gonzalez A 2011 The functional role of producer diversity in ecosystems *American Journal of Botany* **98** 572-92
- [8] Kemp W M, Boynton W R, Adolf J E, Boesch D F, Boicourt W C, Brush G, Cornwell J C, Fisher T R, Glibert P M, Hagy J D, Harding L W, Houde E D, Kimmel D G, Miller W D, Newell R I E, Roman M R, Smith E M and Stevenson J C 2005 Eutrophication of Chesapeake Bay: historical trends and ecological interactions *Mar. Ecol. Prog. Ser.* **303** 1-29
- [9] Adl S M, Simpson A G B, Lane C E, Lukes J, Bass D, Bowser S S, Brown M W, Burki F, Dunthorn M, Hampl V, Heiss A, Hoppenrath M, Lara E, le Gall L, Lynn D H, McManus H, Mitchell E A D, Mozley-Stanridge S E, Parfrey L W, Pawlowski J, Rueckert S, Shadwick L,

- Schoch C L, Smirnov A and Spiegel F W 2012 The Revised Classification of Eukaryotes *Journal of Eukaryotic Microbiology* **59** 429-93
- [10] Zhu W, Qin C, Ma H, Xi S, Zuo T, Pan W and Li C 2020 Response of protist community dynamics and co-occurrence patterns to the construction of artificial reefs: A case study in Daya Bay, China *Science of the Total Environment* **742**
- [11] Falkowski P G and Raven J A 1997 *Aquatic Photosynthesis* (Malden, USA: Blackwell Science)
- [12] Napoleon C and Claquin P 2012 Multi-Parametric Relationships between PAM Measurements and Carbon Incorporation, an In Situ Approach *PLoS One* **7**
- [13] Claquin P, Kromkamp J C and Martin-Jézéquel V 2004 Relationship between photosynthetic metabolism and cell cycle in a synchronized culture of the marine alga *Cylindrotheca fusiformis* (Bacillariophyceae) *Eur. J. Phycol.* **39** 33-41
- [14] Hubas C and Davoult D 2006 Does seasonal proliferation of *Enteromorpha* sp affect the annual benthic metabolism of a small macrotidal estuary? (Roscoff Aber Bay, France) *Estuarine Coastal and Shelf Science* **70** 287-96
- [15] Abril G 2009 Comments on: "Underwater measurements of carbon dioxide evolution in marine plant communities: A new method" by J. Silva and R. Santos *Estuarine, Coastal and Shelf Science* **78**(2008) 827-830 Discussion *Estuarine Coastal and Shelf Science* **82** 357-60
- [16] Vivier B, Claquin P, Lelong C, Lesage Q, Peccate M, Hamel B, Georges M, Bourguiba A, Bourguiba N, Boutouil M, Goux D, Dauvin J C and Orvain F Submitted Influence of biomaterial composition and microtopography on marine biofilms growth and photobiology *Biofouling*
- [17] Schreiber U, Gademann R, Ralph P J and Larkum A W D 1997 Assessment of photosynthetic performance of *Prochloron* in *Lissoclinum patella* in hospite by chlorophyll fluorescence measurements *Plant and Cell Physiology* **38** 945-51
- [18] Genty B, Briantais J M and Baker N R 1989 The relationship between the quantum yield of photosynthetic electron-transport and quenching of chlorophyll fluorescence *Biochim. Biophys. Acta* **990** 87-92
- [19] Figueroa F L, Escassi L, Perez-Rodriguez E, Korbee N, Giles A D and Johnsen G 2003 Effects of short-term irradiation on photoinhibition and accumulation of mycosporine-like amino acids in sun and shade species of the red algal genus *Porphyra* *Journal of Photochemistry and Photobiology B-Biology* **69** 21-30
- [20] Figueroa F L, Conde-Alvarez R and Gomez I 2003 Relations between electron transport rates determined by pulse amplitude modulated chlorophyll fluorescence and oxygen evolution in macroalgae under different light conditions *Photosynth. Res.* **75** 259-75
- [21] Schneider G, Figueroa F L, Vega J, Aviles A, Chaves P, Horta P A, Korbee N and Bonomi-Barufi J 2020 Physiological and biochemical responses driven by different UV-visible radiation in *Osmundea pinnatifida* (Hudson) Stackhouse (Rhodophyta) *Photochem. Photobiol. Sci.* **19** 1650-64
- [22] Boatman T G, Geider R J and Oxborough K 2019 Improving the Accuracy of Single Turnover Active Fluorometry (STAF) for the Estimation of Phytoplankton Primary Productivity (PhytoPP) *Frontiers in Marine Science* **6**
- [23] Webb W L, Newton M and Starr D 1974 Carbon-dioxide exchange of *alnus-rubra* - Mathematical-model *Oecologia* **17** 281-91
- [24] Gevaert F, Delebecq G, Menu D and Brutier L 2011 A fully automated system for measurements of photosynthetic oxygen exchange under immersed conditions: an example of its use in *Laminaria digitata* (Heterokontophyta: Phaeophyceae) *Limnology and Oceanography-Methods* **9** 361-79
- [25] Schneck F, Schwarzbald A and Melo A S 2011 Substrate roughness affects stream benthic algal diversity, assemblage composition, and nestedness *J. N. Am. Benthol. Soc.* **30** 1049-56

- [26] Migne A, Delebecq G, Davoult D, Spilmont N, Menu D and Gevaert F 2015 Photosynthetic activity and productivity of intertidal macroalgae: In situ measurements, from thallus to community scale *Aquatic Botany* **123** 6-12
- [27] Beer S and Axelsson L 2004 Limitations in the use of PAM fluorometry for measuring photosynthetic rates of macroalgae at high irradiances *Eur. J. Phycol.* **39** 1-7
- [28] Figueroa F L, Salles S, Aguilera J, Jimenez C, Mercado J, Vinegla B, FloresMoya A and Altamirano M 1997 Effects of solar radiation on photoinhibition and pigmentation in the red alga *Porphyra leucosticta* *Mar. Ecol. Prog. Ser.* **151** 81-90
- [29] Franklin L A and Badger M R 2001 A comparison of photosynthetic electron transport rates in macroalgae measured by pulse amplitude modulated chlorophyll fluorometry and mass spectrometry *J. phycol.* **37** 756-67
- [30] Figueroa F L, Hermoso-Beltran M, Celis-Pla P S M, Bonomi-Barufi J, Alvarez-Gomez F, Korbee N, Lopez-Calderon J, Cota-Lucero T and Riosmena-Rodriguez R 2016 Photosynthetic activity estimated as in vivo chlorophyll a fluorescence in calcareous red macroalgae *Ciencias Marinas* **42** 139-55
- [31] Ralph P J and Gademann R 2005 Rapid light curves: A powerful tool to assess photosynthetic activity *Aquatic Botany* **82** 222-37
- [32] Kim J H, Choi S J and Lee S 2019 Effects of temperature and light on photosynthesis and growth of red alga *Pyropia dentata* (Bangiales, Rhodophyta) in a conchocelis phase *Aquaculture* **505** 167-72
- [33] Johnsen G and Sakshaug E 2007 Biooptical characteristics of PSII and PSI in 33 species (13 pigment groups) of marine phytoplankton, and the relevance for pulse-amplitude-modulated and fast-repetition-rate fluorometry *J. phycol.* **43** 1236-51
- [34] Kana R, Kotabova E, Lukes M, Papacek S, Matonoha C, Liu L-N, Prasil O and Mullineaux C W 2014 Phycobilisome Mobility and Its Role in the Regulation of Light Harvesting in Red Algae *Plant Physiol.* **165** 1618-31
- [35] Kowalczyk N, Rappaport F, Boyen C, Wollman F-A, Collen J and Joliot P 2013 Photosynthesis in *Chondrus crispus*: The contribution of energy spill-over in the regulation of excitonic flux *Biochimica Et Biophysica Acta-Bioenergetics* **1827** 834-42
- [36] Allen J F 2003 State transitions - a question of balance *Science* **299** 1530-2
- [37] Williams W P and Allen J F 1987 State-1/state-2 changes in higher-plants and algae *Photosynth. Res.* **13** 19-45
- [38] Gefen-Treves S, Kedem I, Weiss G, Wagner D, Tchernov D and Kaplan A 2020 Acclimation of a rocky shore algal reef builder *Neogoniolithon* sp. to changing illuminations *Limnol. Oceanogr.* **65** 27-36
- [39] Ly O, Yoris-Nobile A I, Sebaibi N, Blanco-Fernandez E, Boutouil M, Castro-Fresno D, Hall A E, Herbert R J H, Deboucha W, Reis B, Franco J N, Borges M T, Sousa-Pinto I, van der Linden P and Stafford R 2021 Optimisation of 3D printed concrete for artificial reefs: Biofouling and mechanical analysis *Construction and Building Materials* **272**
- [40] Serre-Fredj L, Jacqueline F, Navon M, Izabel G, Chasselin L, Jolly O, Repecaud M and Claquin P 2021 Coupling high frequency monitoring and bioassay experiments to investigate a harmful algal bloom in the Bay of Seine (French-English Channel) *Marine Pollution Bulletin* **168** 112387
- [41] Finkel Z V, Irwin A J and Schofield O 2004 Resource limitation alters the 3/4 size scaling of metabolic rates in phytoplankton *Mar. Ecol. Prog. Ser.* **273** 269-79
- [42] de Vasconcelos E, Vasconcelos J B, Reis T N D, Cocentino A D M, Mallea A J A, Martins G M, Neto A I and Fujii M T 2019 Macroalgal responses to coastal urbanization: relative abundance of indicator species *J. Appl. Phycol.* **31** 893-903